





# DCB II - CUSTOM

## CUSTOM CATCH BASIN DOUBLE TYPE II


SUMP	1'6", 2', 2'6", 3', AND 4'
RISER	1', 1'6", 2', 2'6", 3', 3'6", AND 4'
CONE	12"
RISER W/CB OPNG	2'8", 3'2", 3'8", 4'2" AND 4'8"

### DESIGN NOTES


1. CONCRETE -5000 PSI, 28 DAYS
2. REINFORCEMENT - ASTM A-615, GRADE 60
3. OPTIONAL GALVANIZED FRAME & GRATE
4. RISER WITH CB OPNG  
 CL TOP - 5'10 1/2" X 3'4 3/4" OPENING  
 C TOP - 5'10 1/2" X 2'1 3/8" OPENING

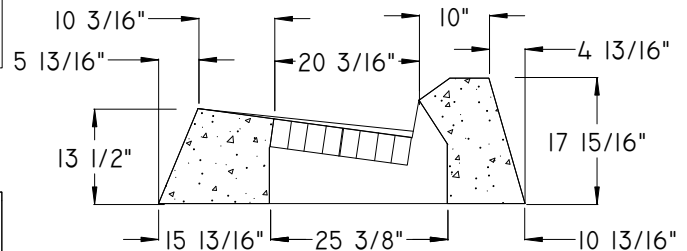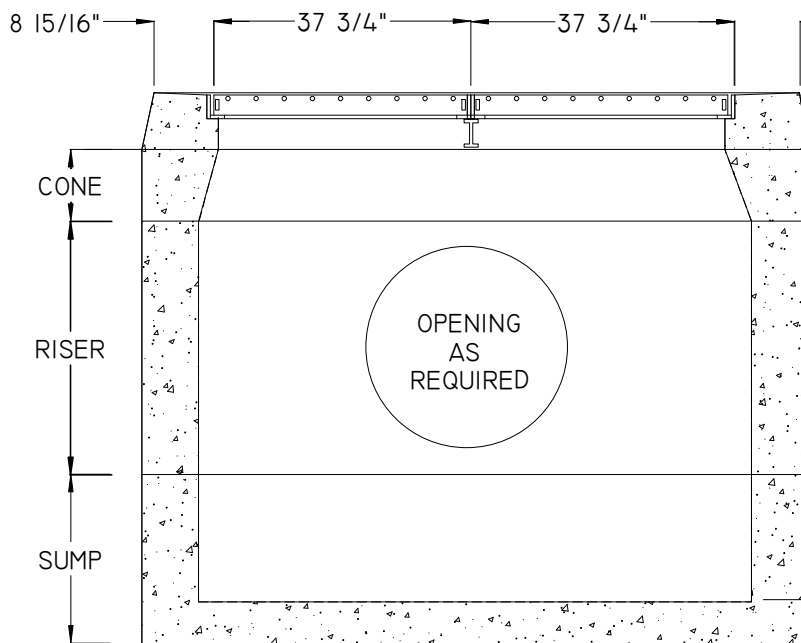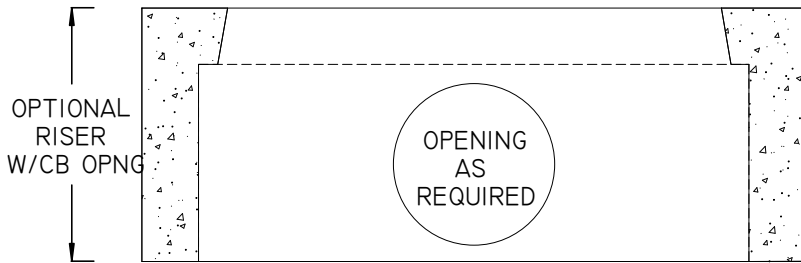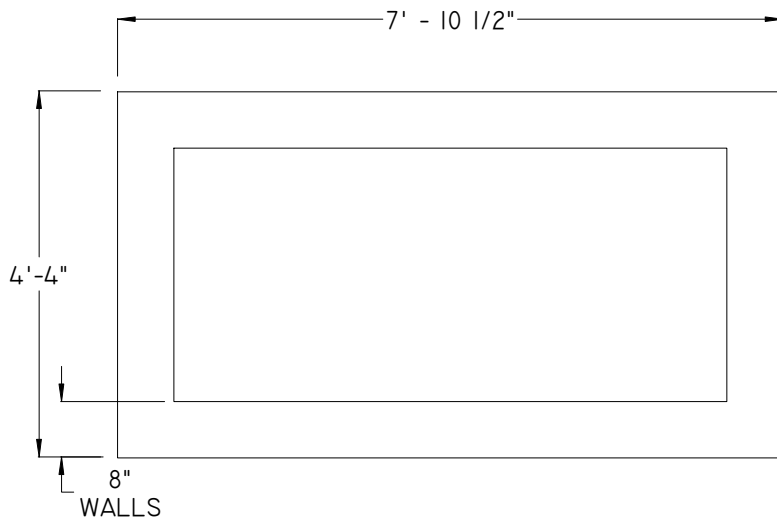


BITUMINOUS CURB TOP

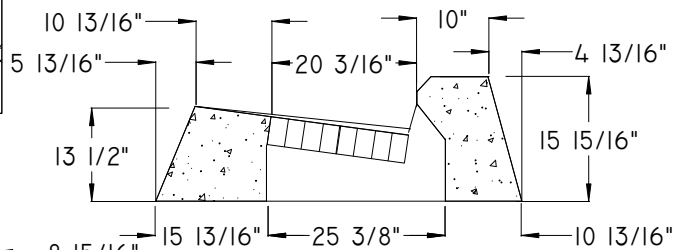

PARK CURB TOP

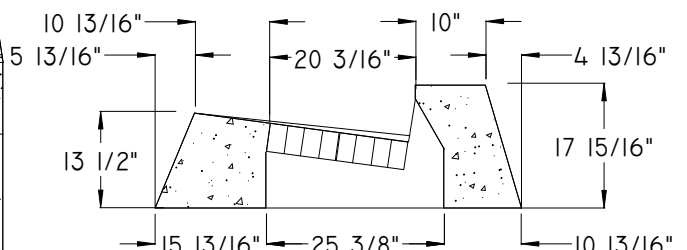

CONCRETE CURB TOP

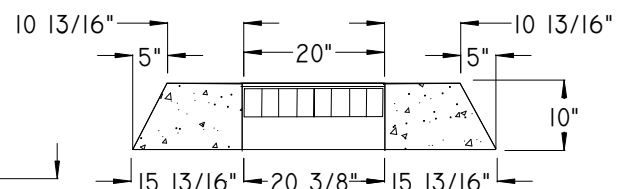

FLAT TOP